

DN-C615

Specifications

Audio Channel	2 stereo channel
Digital Filter	8-times oversampling digital filter
Frequency Response	20 Hz - 20 kHz
Total Harmonic Distortion	0.007%
S/N Ratio	107 dB (A weighted)
Channel Separation	90 dB or more
Sampling Frequency	44.1 kHz (at normal pitch)
Analog Outputs (1 kHz, 0 dB playback)	
Output Level	2.0 Vrms, 10 kohms
Digital Output	
Transfer and Connector	Coaxial (RCA)
Signal Format	IEC-958 type II (SPDIF)
Power Supply	AC120V, 60 Hz
Power Consumption	13W
Dimensions	482 (W) x 88 (H) x 280 (D) mm 19.0 (W) x 3.5 (H) x 11.0 (D) inch (2 rack units, removable rack ears)
Weight	4.7 kg, 10.4 lbs

Specifications are subject to change without notice.



Figure 1


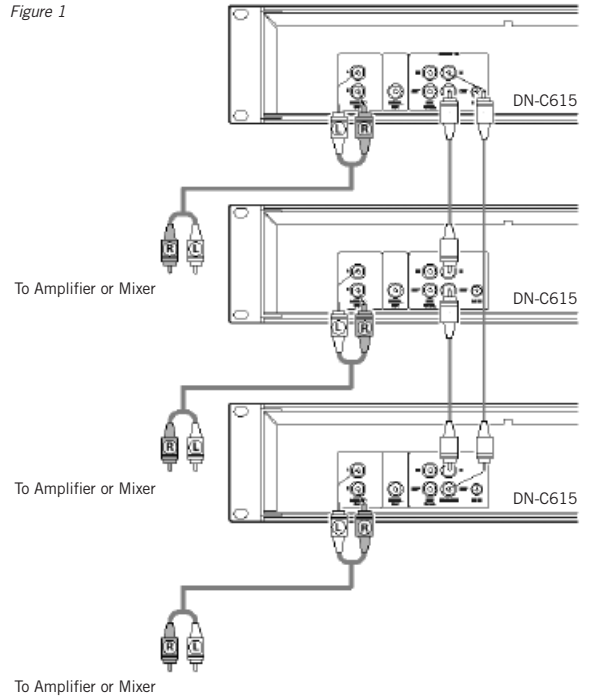


Figure 2

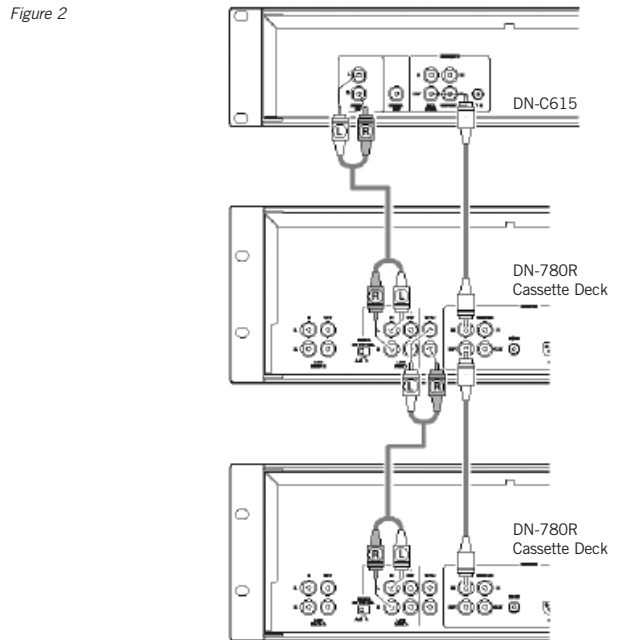

D&M Professional
1100 Maplewood Drive Itasca, Illinois 60143
Tel: 630.741.0330 Fax: 630.741.0652
www.d-mpro.com

© 2004 D&M Professional. All rights reserved.

DENON PROFESSIONAL **marantz** PROFESSIONAL

1 2 3 4 5 6 7 8 9
min | max
LEVEL